


Powell Chlorine Control Module

Powell has combined high quality chlorine-rated components with the latest design recommendation from The Chlorine Institute, Inc. Pamphlet 57 into a single unit. The Powell Chlorine Control Module is supplied as a complete unit with all controls and instrumentation pre-assembled, wired and pressure tested. This simplifies installation significantly and can result in considerable savings in time and materials.

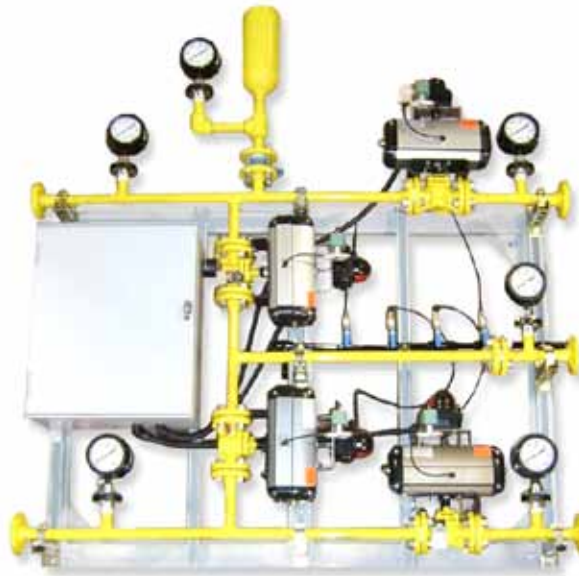

Features of the Powell Chlorine Control Module include:

- Welded A-106 seamless schedule 80 carbon steel piping.
- 300# flanged Durco plug valves, Hastelloy® C and Monel® available.
- Ashcroft 30/0/300 compound pressure gauges, 300# flanged or 1" NPT seals available
- Allen-Bradley CompactLogix® processor with 7" color screen display, NEMA 4X enclosure, programmed by Powell.
- Instrument air manifold, individual isolation valves with locking handles.
- ASCO low power 24 VDC solenoid valves.



740 East Monroe Road
St. Louis MI 48880
Phone: 888.800.2310 (Toll Free)
989.681.2158 (Local)
Fax: 989.681.5013
email: info@powellfab.com
website: www.powellfab.com
www.valveclosures.com
5150.12312009